



## Inclined Spiked Lattice Assembly

### DIMENSIONAL DETAILS TO BE FILLED BY THE MILLS FOR INCLINED SPIKED LATTICE


- 1 Fill centre to centre distance between the lattice rollers **X =**  mm  
Fill Dia Meter of Lattice Rollers in MM

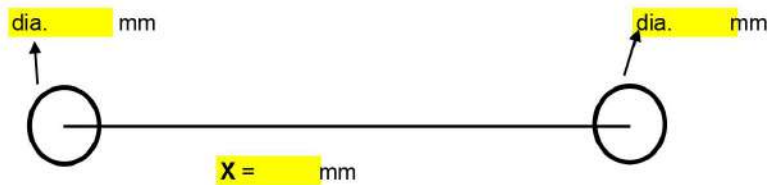


- 2 Total number of wooden lags (No. of pieces) per lattice =  Pieces  
Wooden Lag Thickness **X =**  mm  
Wooden Lag Height **Y =**  MM

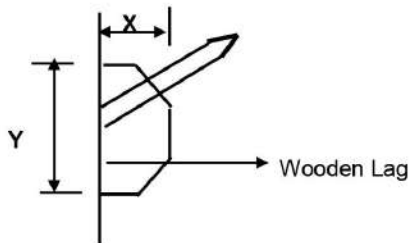


- 3 Distance of Spike Edge from base canvas cloth **X =**  mm  
Diameter of the Spike **Y =**  mm

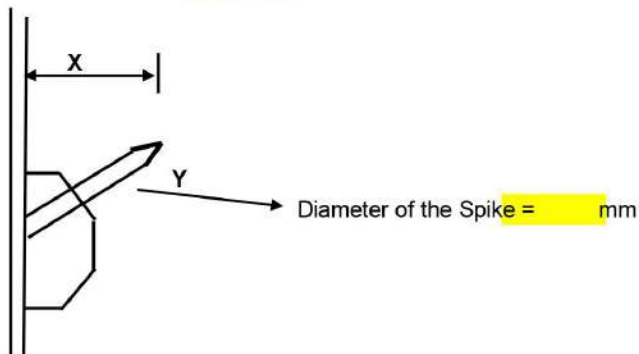


- Distance of Spike Edge from Wooden Lag Outer - **Z =**  mm

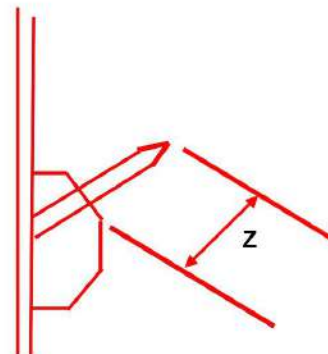





- 4 Tick Shape of Wooden Lag = **A, B, or C** =

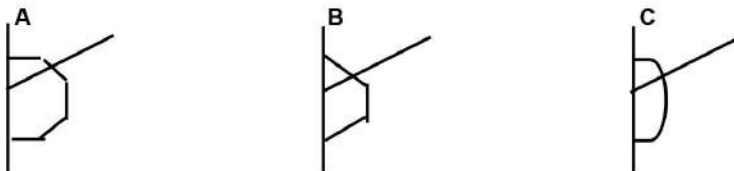



- 5 No of Rows of Belt at back side of lattice =  rows (3 or 4 or 5)  
 Distance from Side to the Belt **X** =  mm  
 Width of the Belt **Y** =  mm  
 Distance between Belts **Z** =  mm  
 Thickness of the Belt =  mm

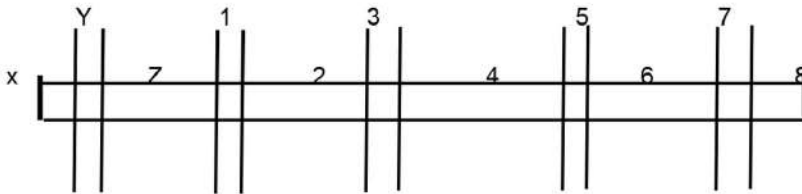

- 6 No.of Spikes per Wooden Lag =  Nos  
 Arrangement pof Spikes = **Zig Zag** or **Straight**



- 7 Total Width of lattice **X** =  mm  
 Total Outer Circumference of Lattice **Y** =  mm

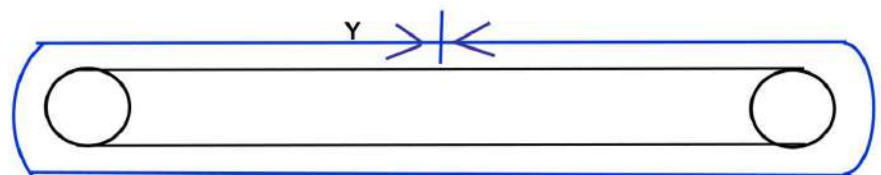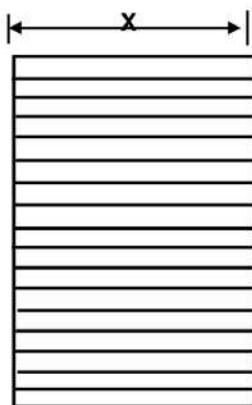

- 8 Machine:   
 Model :   
 Com No:   
 Year :

